

**AUSTRALIA**  
**PATENTS ACT 1990**  
**NOTICE OF ENTITLEMENT**

We, **Cook Incorporated**, the applicant/Nominated Person in respect of  
Application No. 34742/93 state the following:-

The Nominated Person is entitled to the grant of the patent  
because the Nominated Person derives title to the invention from  
the inventors by assignment.

The Nominated Person is entitled to claim priority from the  
application listed in the declaration under Article 8 of the PCT  
because the Nominated Person is the assignee of the applicants in  
respect of the application listed in the declaration under Article 8  
of the PCT, and because that application was the first application  
made in a Convention country in respect of the invention.

DATED this TENTH day of AUGUST 1994



.....  
a member of the firm of  
**DAVIES COLLISON**  
CAVE for and on behalf  
of the applicant(s)

(DCC ref: 1680975)



AU9334742

**(12) PATENT ABRIDGMENT (11) Document No. AU-B-34742/93**  
**(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 669153**

- (54) Title  
**SPIRAL STENT**
- (51)<sup>6</sup> International Patent Classification(s)  
**A61M 029/00**
- (21) Application No. : **34742/93** (22) Application Date : **14.01.93**
- (87) PCT Publication Number : **WO99/13825**
- (30) Priority Data
- (31) Number (32) Date (33) Country  
**821477 15.01.92 US UNITED STATES OF AMERICA**
- (43) Publication Date : **03.08.93**
- (44) Publication Date of Accepted Application : **30.05.96**
- (71) Applicant(s)  
**COOK INCORPORATED**
- (72) Inventor(s)  
**MUNEHIRO MAEDA; HANS A. TIMMERMANS; BARRY T UCHIDA; JOSEF ROSCH**
- (74) Attorney or Agent  
**DAVIES COLLISON CAVE . 1 Little Collins Street, MELBOURNE VIC 3000**
- (56) Prior Art Documents  
**US 5035705**  
**US 4580588**  
**AU 88503/91 A61M 29/00**

(57) Claim

1. A self-expanding stent comprising:  
a wire bent into an elongated zigzag pattern having a plurality of substantially straight wire sections separating a plurality of bends;  
said zigzag pattern being helically wound about a central axis to define a tubular shape such that a majority of said plurality of bends are disposed in a helix;  
means for interconnecting adjacent bends of said helix;  
and  
said stent having a radially compressed state such that said straight wire sections and said bends are tightly packed around said central axis, whereby said stent resiliently self-expands to assume said tubular shape when released from said compressed state.

OPI DATE 03/08/93 APPLN. 10 34742/93  
 AOJP DATE 14/10/93 PCT NUMBER PCT/US93/00355



AU9334742

(D)

(51) International Patent Classification 5 :

A61M 29/00, A61F 2/06

A1

(11) International Publication Number:

WO 93/13825

(43) International Publication Date:

22 July 1993 (22.07.93)

(21) International Application Number: PCT/US93/00355

(22) International Filing Date: 14 January 1993 (14.01.93)

(30) Priority data:  
07/821,477

15 January 1992 (15.01.92) US

(71) Applicant: ~~THE STATE OF OREGON acting by and through THE STATE BOARD OF HIGHER EDUCATION ON BEHALF OF THE OREGON HEALTH SCIENCES UNIVERSITY (US/US) 3181 S.W. Sam Jackson Park Road, Portland, OR 97201-3098 (US)~~

(72) Inventors: MAEDA, Munichiro : 11-3, Uchihonmachi, Yamato-Takada-shi, Nara Prefecture 635 (JP). TIMMERMAN, Hans, A. : 1100 S.W. Curry, Apt. H, Portland, OR 97201 (US). UCHIDA, Barry, T. : 15190 South West Quarry, Lake Grove, OR 97034 (US). ROSCH, Josef : 9448 S.W. Lancaster Road, Portland, OR 97219 (US).

(71) ~~COOK INC.~~ COOK INCORPORATED

925 South Curry Pike  
 Bloomington, IN 47402  
 United States of America

(74) Agents: EMHARDT, C., David et al.; Woodard, Emhardt, Naughton, Moriarty & McNett, Bank One Center Tower, Suite 3700, 111 Monument Circle, Indianapolis, IN 46204 (US).

(81) Designated States: AU, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

669153



(54) Title: SPIRAL STENT

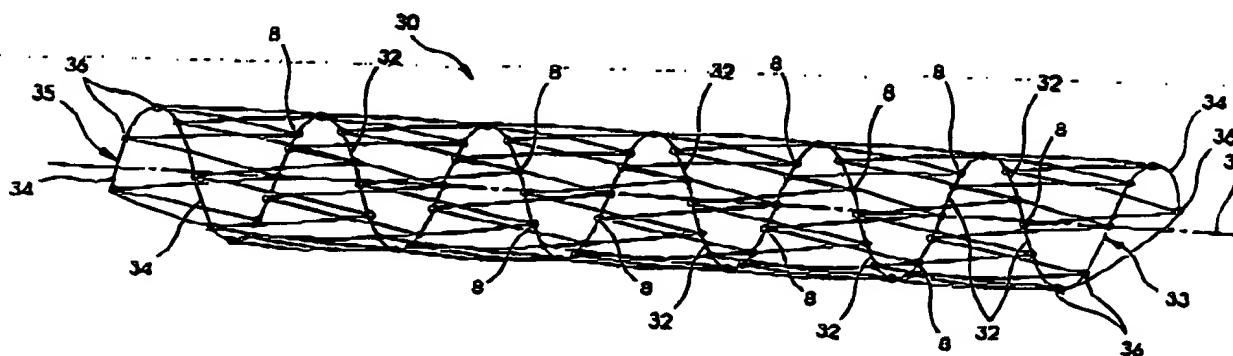

## (57) Abstract

A self-expanding endovascular stent formed of stainless steel wire which is bent into an elongated zigzag pattern (5) and helically wound about a central axis (31) to define a tubular shape (30). Adjacent bends (8) in the helix are interconnected with a filament (32). The stent (30) is capable of being radially compressed such that the straight wire sections (11, 13 and 15), and the bends (8) are tightly packed around a central axis (31). The stent (30) resiliently self-expands to assume a tubular shape when released from the compressed state.

WO 93/13825

PCT/US93/00355

## SPIRAL STENT

## BACKGROUND OF THE INVENTION

This invention relates generally to self-expanding endovascular stents for use in preventing restenosis of passageways and ducts in the body, to repair aneurysms percutaneously, and also for dilating recurring stenosis immediately after attempts with ballooning.

This invention represents an improvement in the self-expanding stents described and shown in U.S. Patent No. 4,580,568 to Gianturco. Conventional stents of this type include a wire formed in a closed zigzag configuration that includes an endless series of straight sections joined by bends. A conventional zigzag stent is resiliently compressible into a small diameter such that the straight sections are arranged side by side and closely adjacent one another for insertion into a passageway. The stent is resiliently self-expandable into a larger second diameter wherein the straight sections press against the walls of the passageway to maintain it open. Although conventional zigzag stents have proven quite useful in many situations, their performance characteristics tend to decrease as the length of the stent increases.

Self-expanding stents are normally evaluated with respect to four performance characteristics: the radially outward expansile force that the stent exerts on the vascular wall; the small diameter to which the stent is capable of being compressed for the insertion procedure; the ability of the stent to adapt to curved passageways in the patient's body; and the stability of the stent in not migrating from its originally implanted position within the patient.

Conventional zigzag stents must normally be made

WO 93/13825

PCT/US93/00355

-2-

relatively short because the straight wire sections prevent the stent from readily adapting to curves in the passageway of a patient. Furthermore, the expansile force of conventional zigzag stents generally decreases with the length of the stent. One solution to these drawbacks has been to modify the conventional zigzag stent by connecting a plurality of shorter stents end on end to create one longer zigzag stent assembly. Although these modified zigzag stents represent an improvement over conventional zigzag stents for certain applications, there exists a need for an elongated self-expanding stent that includes the advantages of both conventional and modified zigzag stents but which has improved performance characteristics over both.

The present invention also represents an improvement over the self-expanding spiral stents described in U.S. Patent No. 5,019,090 to Pinchuk. Pinchuk teaches the production of an elongated zigzag pattern by spirally wrapping a wire about an oblong mandrel, removing the mandrel, and then flattening the spiral to produce an elongated zigzag band. The elongated zigzag band is then spirally wrapped around a cylindrical mandrel to produce the stent. One drawback to the Pinchuk design, however, is that all of the elongate members that make up the zigzag pattern have equal lengths. The result being that a bisector of the angle defined by each pair of elongated members is not parallel to the central axis of the finished stent. This causes the stent to undesirably distort in shape when radially compressed for the implantation procedure. What is needed is a spiral zigzag stent in which a bisector of each pair of elongated members is parallel to the central axis of the finished stent. Such a stent cannot be produced by the method for making stents taught by Pinchuk.

WO 93/13825

PCT/US93/00355

-3-

## SUMMARY OF THE INVENTION

The preferred embodiment of the present invention includes a wire bent into an elongated zigzag pattern having a plurality of substantially straight wire sections separating a plurality of bends. The elongated zigzag pattern is helically wound about a central axis to define a tubular shape such that a majority of the plurality of bends are disposed in a helix. Means are provided for interconnecting adjacent bends of the helix. The stent has the capability of being radially compressed into a small-diameter shape such that the straight wire sections and the bends are tightly packed around the central axis of the tubular shape. The stent will resiliently self expand to assume the tubular shape when released from the compressed state.

One object of the present invention is to provide an elongated self-expanding stent having substantially uniform expansile force along the length of the stent.

Another object of the present invention is to provide a self-expanding stent which may be compressed into a small diameter for improved percutaneous insertability.

Still another object of the present invention is to provide an elongated self-expanding stent which has a substantially uniform capability along its length to adapt to curves in the vascular system where the stent is implanted.

Another object of the present invention is to provide a stent which has improved stability in maintaining its position within the patient.

Finally, it is an object of the present invention to provide an improved self-expanding stent.

Related objects and advantages of the present invention will be apparent from the following description.

WO 93/13825

PCT/US93/00355

-4-

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view showing a wire bent into an elongated zigzag pattern.

FIG. 2 is an enlarged view of one end of the zigzag pattern  
5 of FIG. 1.

FIG. 3 is a side elevation of the preferred embodiment of the present invention in its expanded state.

FIG. 4 is an end view of the stent of FIG. 3.

FIG. 5 is a side elevation of the preferred embodiment of  
10 the present invention in its compressed state.

FIG. 6 is an enlarged view of a portion stent of FIG. 3.

FIG. 7 is a side elevation of another embodiment of the present invention in its expanded shape.

WO 93/13825

PCT/US93/00355

-5-

## DESCRIPTION OF THE PREFERRED EMBODIMENT

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiment illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated device, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

Referring now more particularly to the drawings, there is illustrated in FIG. 1 a midpoint in the construction of the stent which comprises the preferred embodiment of the present invention. FIG. 1 shows a wire bent into an elongated zigzag pattern 5 having a plurality of substantially straight wire sections 9-15 of various lengths separated by a plurality of bends 8. The wire has first and second ends designated as 6 and 7, respectively. Zigzag pattern 5 is preferably formed from a single strand of stainless steel wire having a diameter in the range of 0.005 to 0.025 inch.

FIG. 3 shows a completed stent 30 according to the preferred embodiment of the present invention. The construction of the stent is completed by helically winding elongated zigzag pattern 5 about a central axis 31. Zigzag pattern 5 is wound in such a way that a majority of the bends 8 are distributed in a helix along the length of the stent 30. There are preferably about twelve interconnected bends in each revolution of the helix, or six adjacent bends of the zigzag pattern in each revolution. The construction of stent 30 is completed by interconnecting adjacent bends of the helix with a filament 32, preferably a nylon monofilament suture. Filament 32 acts as a limit means to prevent the



WO 93/13825

PCT/US93/00355

-6-

slent from further radial expansion beyond the tubular shape shown in Figs. 3 and 4. The tubular shape has a central axis 31, a first end 33 and a second end 35. Each end of stent 30 is defined by a plurality of end bends 36, which are themselves interconnected with a filament 34. Other embodiments of the present invention are contemplated in which the end bends 36 are left unconnected in the finished stent. FIG. 4 shows an end view of stent 30 further revealing its tubular shape. FIG. 5 shows stent 30 of FIG. 3 when radially compressed about central axis 31 such that the straight wire sections and the bends are tightly packed around central axis 31.

Referring back to FIG. 1, the zigzag pattern is made up of straight wire sections having various lengths which are distributed in a certain pattern to better facilitate the helical structure of the final stent construction. For instance, in one embodiment, end wire sections 9 could be made to a length of 9 mm followed by two wire sections 11 each being 11 mm in length. Wire sections 11 are followed by two 13 mm wire sections 13, which are in turn followed by two wire sections 15 having a length of 15 mm. Sections 15 are followed by a single wire section 17 having a length of 17 mm. These gradually increasing wire sections at either end of the zigzag pattern enable the final stent to have well defined square ends. In other words, the gradually increasing length wire sections on either end of the zigzag pattern enable the final stent to have a tubular shape in which the ends of the tube are substantially perpendicular to the central axis of the stent. Following wire section 17, there are a plurality of alternating length sections 13 and 15. Short sections 13 being 13 mm in length and long sections 15 being 15 mm in length. This alternating sequence is continued for whatever distance is desired to correspond to the desired length of the final stent. The difference in length between the short sections 13 and long sections 15 is

WO 93/13825

PCT/US93/00355

-7-

primarily dependent upon the desired slope of the helix (see B in FIG. 6) and the desired number of bends in each revolution of the helix.

Another important aspect of the present invention is illustrated in FIG. 6, which is an enlarged view of a portion of the stent shown in FIG. 3. The body of stent 30 includes a series of alternating short and long sections, 13 and 15 respectively. A bend 8 connects each pair of short and long sections 13 and 15. Each bend 8 defines an angle  $2\alpha$  which can be bisected by a bisector 40. These short and long sections are arranged in such a way that bisector 40 is parallel to the central axis 31 of the stent. This allows the stent to be radially compressed without unnecessary distortion.

FIG. 2 shows an enlarged view of one end of the zigzag pattern. End 6 of the wire is bent to form a closed eye portion 20. Eye 20 is preferably kept closed by the application of the small amount of solder to the end 6 of the wire after it has been bent into a small loop. Each of the bends 8 of the zigzag pattern are bent to include a small eye portion designated as 21 and 23 in FIG. 2, respectively. Eye 21 includes a small amount of solder 22 which renders eye 21 closed. Eye 23 includes no solder and is left open. In the preferred embodiment, all the end bends 36 shown in FIG. 3 are formed and soldered similar to closed eye 21 so that the filament which is tied to each eye is less likely to escape. The bends 8 which define the helix can be either in the form of a closed eye, as in eye 21, or open as in eye 23.

FIG. 7 shows another embodiment of the present invention. Stent 50 is similar to stent 30 discussed previously except in this case, end bends 56 are not interconnected to one another. Stent 50 is also different in the way that the respective ends of the wire are connected to the remainder of the stent. In the case of stent 50, the end sections 59 are soldered to an adjacent elongated section

WO 93/13825

PCT/US93/00355

-8-

60. On the other hand, ends 6 of stent 30 shown in FIG. 3 are tied into the helix between two adjacent bends 8 of the helix. It is to be understood that the means employed for connecting the ends of the wire into the finished stent can be varied without departing from the intended scope of the present invention. What is important is that the end sections of the wire be secured to the stent in such a way that they are not left to dangle freely so as to interfere with the stents expansion or present a risk of unnecessary trauma to the vascular wall of the patient.

Because of the helical pattern of the present invention, the bends of the stent are distributed along its length rather than being concentrated at certain locations along the length of the stent. Thus the spiral stent is able to define a smaller compressed shape than either conventional zigzag stents or modified zigzag stents in which the bends are all located at a single location along the length of the stent. It is also believed that the helical pattern allows the elongated stent to more uniformly accommodate curves in the vascular system of a patient. The helical structure also produces a more uniform radial expansile force along the length of the stent. Finally, the spiral stents of the present invention are more reliable in maintaining their position within a patient.

One variation of the present invention might include a flexible sleeve attached to the outer or inner surface of the stent such that an elongated stent could be used to repair an aneurysm. In this use, the end portions of the sleeved stent would contact the wall of the vessel, and the body of the sleeved stent would span the aneurysm. The sleeve could be made from nylon, plastic or any other biocompatible material. If the sleeve were made of plastic, the stent could be attached to the sleeve by embedding the stent in the plastic. If made of nylon, the sleeve could be attached to the stent by a plurality of stitches. It is to be understood

WO 93/13825

PCT/US93/00355

-9-

that the means for attaching the stent to the sleeve could be varied depending upon the sleeve material, and other factors, without diverging from the intended scope of the present invention. Furthermore, the sleeve itself could be used as the means for interconnecting adjacent bends of the helix.

Another variation of the present invention contemplates varying the lengths of the wire sections in the zigzag pattern. For instance, shortening the longest section and lengthening the shortest sections could be employed to even out the forces near the ends of the stent as well as to make square ends. Another variation would be to arrange the zigzag pattern in such a way that the tubular shape defined by the stent has a diameter that varies along the length of the stent. In other words, a stent could be made hour-glass in shape, or have a steadily tapered inner diameter, or even a combination of the two. This could be accomplished by varying along the length of the stent the number of bends in each revolution of the helix. In these variations, the helical pattern would be maintained but would be irregularly shaped along the length of the stent. Still another variation would be to vary the lengths of the wire sections within the body of the stent to create curves or to vary the expansile force along the length of the stent.

While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiment has been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

WO 93/13825

PCT/US93/00355

-10-

We claim:

1. A self-expanding stent comprising:  
a wire bent into an elongated zigzag pattern having a  
plurality of substantially straight wire sections separating  
5 a plurality of bends;  
said zigzag pattern being helically wound about a central  
axis to define a tubular shape such that a majority of said  
plurality of bends are disposed in a helix;  
means for interconnecting adjacent bends of said helix;  
10 and  
said stent having a radially compressed state such that  
said straight wire sections and said bends are tightly packed  
around said central axis, whereby said stent resiliently  
self-expands to assume said tubular shape when released from  
15 said compressed state.
2. The self-expanding stent of claim 1 wherein said  
means for interconnecting is a filament, said filament  
preventing said stent from expanding beyond a tubular shape  
of predetermined size.
- 20 3. The self-expanding stent of claim 2 wherein said  
stent has two ends, each said end being defined by a  
plurality of end bends, adjacent said end bends being  
interconnected by a filament.
4. The self-expanding stent of claim 3 wherein each of  
25 said plurality of bends is bent to include an eye portion,  
said filament being tied to each said eye portion.
5. The self-expanding stent of claim 4 wherein at least  
two of said eye portions are closed.
6. The self-expanding stent of claim 5 wherein said wire

WO 93/13825

PCT/US93/00355

-11-

has first and second ends each formed into defining a closed eye portion, said first and second ends being disposed in said helix and interconnected to two adjacent said bends in said helix.

5        7. The self-expanding stent of claim 2 wherein said wire has first and second ends, each being soldered to a different one of said plurality of straight wire sections.

8. The self-expanding stent of claim 1 wherein said tubular shape defines a length and a diameter that varies  
10 along said length.

9. The self expanding stent of claim 1 further comprising a flexible sleeve open at both ends and attached to said stent, said flexible sleeve being supported by said stent.

15        10. The self expanding stent of claim 1 wherein each of said bends disposed in said helix defines angle, and a bisector of each said angle is substantially parallel to said central axis.

WO 93/13825

PCT/US93/00355

1/3

34 742 / 93

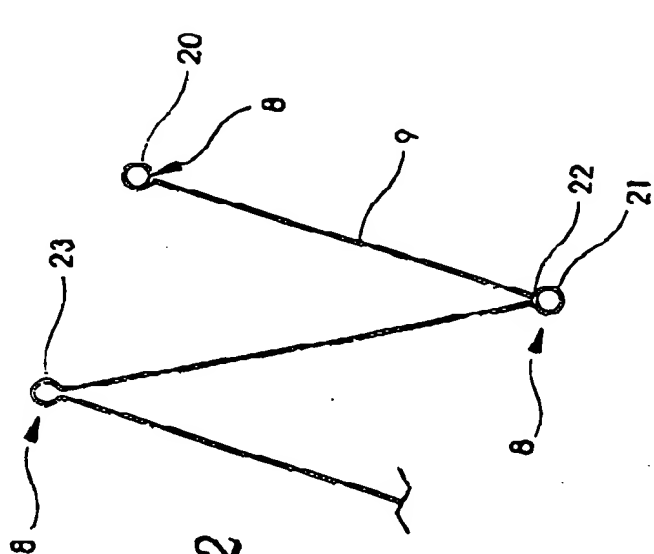


Fig. 2

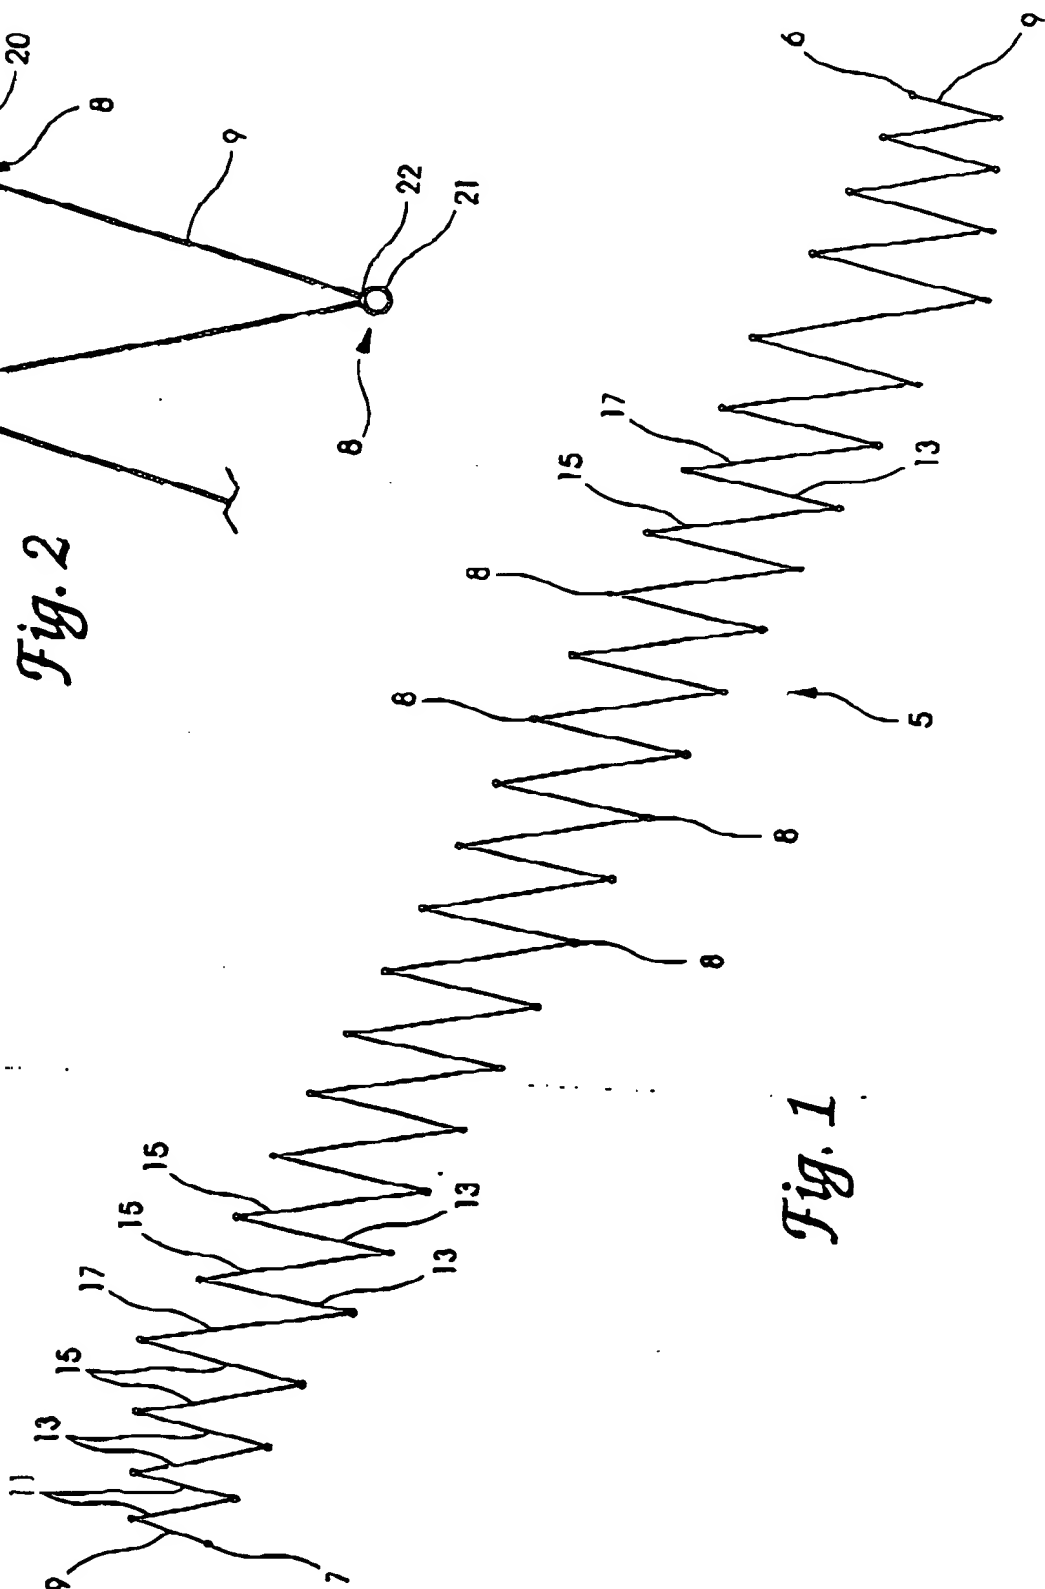


Fig. 1

SUBSTITUTE SHEET

WO 93/13825

PCT/US93/00355

2/3

34742/93

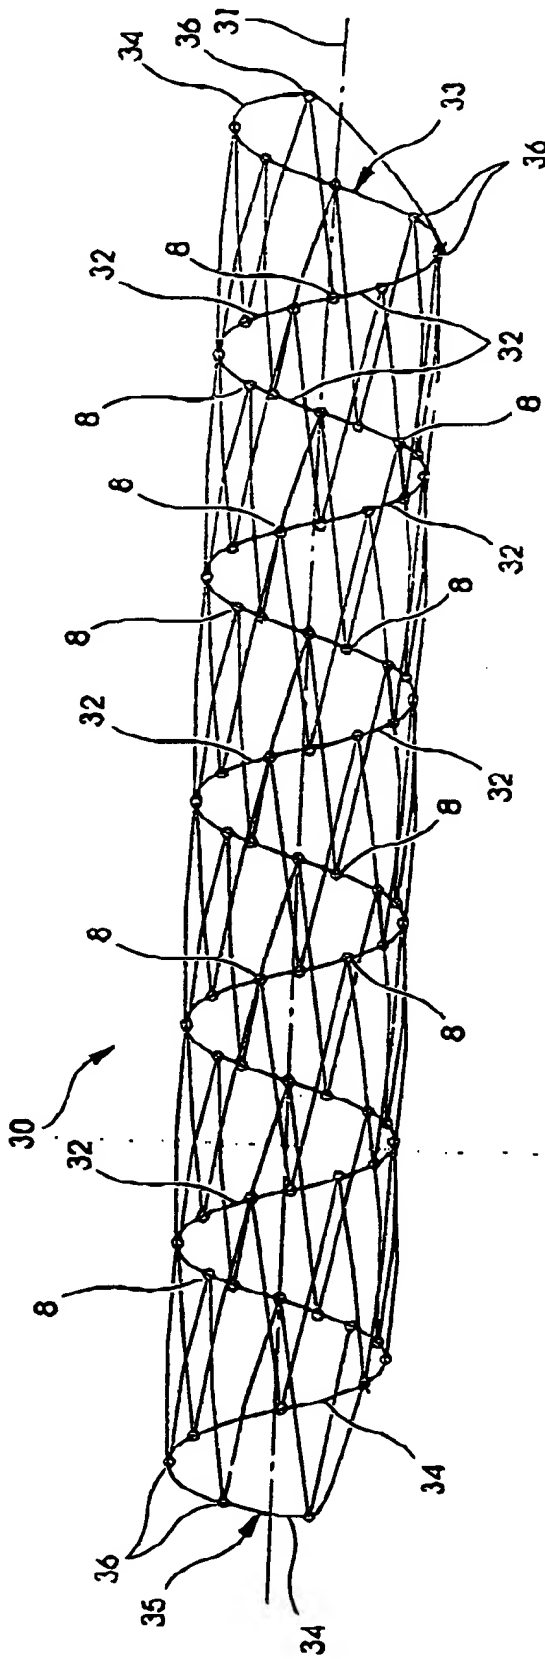


Fig. 3

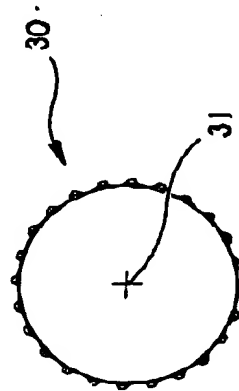


Fig. 4

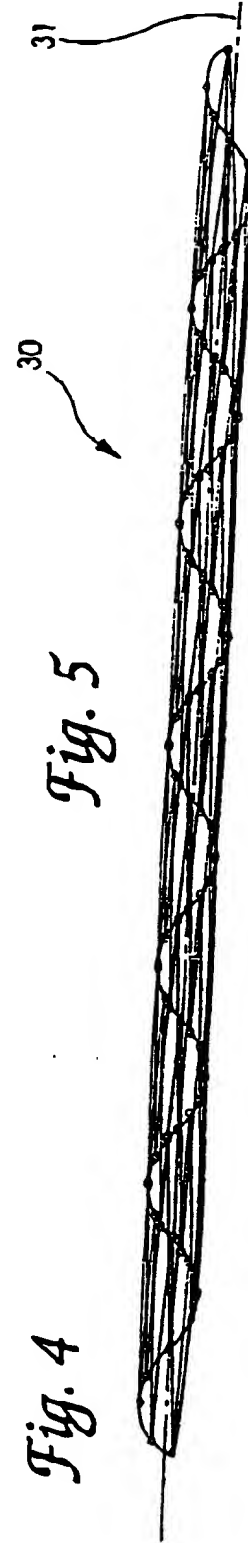


Fig. 5

SUBSTITUTE SHEET





WO 93/13825

PCT/US93/00355

3/3

34742/93

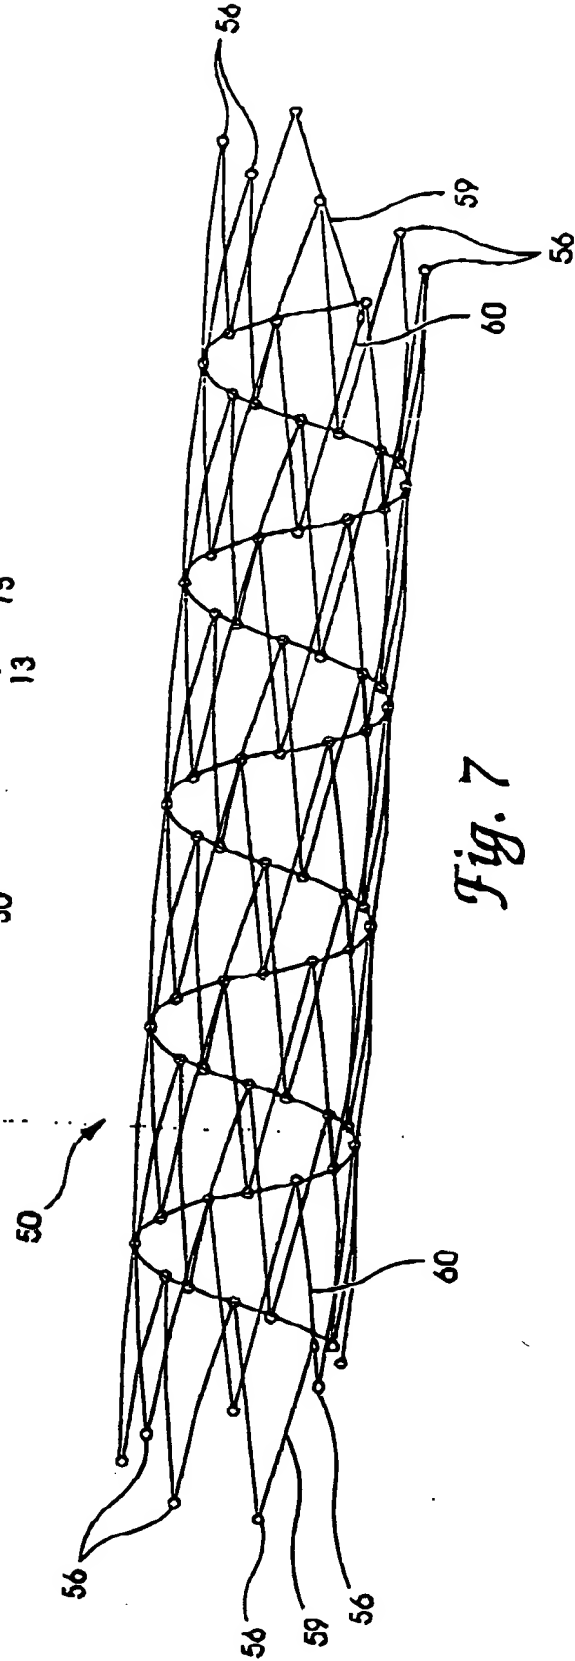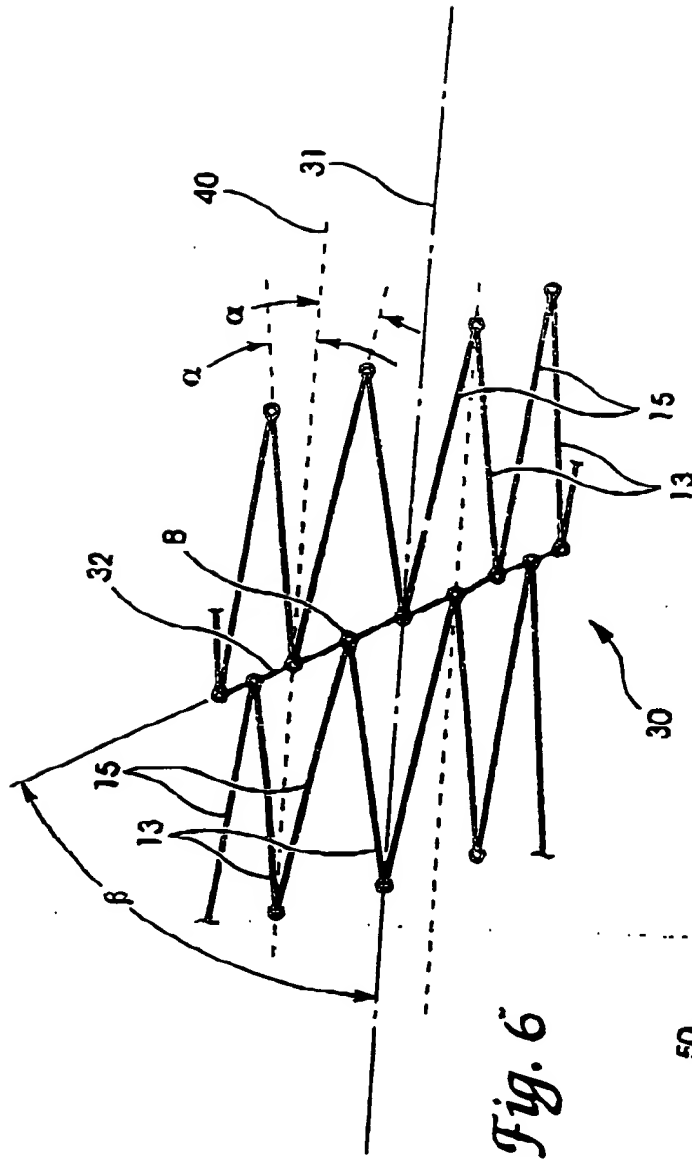

SUBSTITUTE SHEET

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US93/00355

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(S) : A61M 29/00; A61F 2/06  
US CL : 623/1.12; 606/191.194,198

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 604/96 623/11

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	US.A. 5,035,706 (GIANTURCO ET AL) 30 JULY 1991 See figures 3,5,6,7a-b,8,9 and 10 a-c; See column 2, lines 26-66 and column 3, line 58-68	1-10
X	US.A. 4,580,568 (GIANTURCO) 08 APRIL 1986 See figures 1,4,5,6,7,8 and column 1, line 54-column 2, line 58	1,2,3,7,8,9,10
X	EP,A. 0,423,916 (COOK Incorporated) 24 APRIL 1991 See figures 3,5,6,7a-b,8-9 and 10a-c; See column 2, line 42-column 4, line 49	1-10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

*A* Special categories of cited documents: document defining the general state of the art which is not considered to be part of particular references	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*E* earlier documents published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*L* documents which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combinations being obvious to a person skilled in the art
*O* documents referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

09 MARCH 1993

Date of mailing of the international search report

27 APR 1993

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Authorized officer

M DEBRA S. BRITTINGHAM

Telephone No. (703) 308-0858

Facsimile No. NOT APPLICABLE

Form PCT/ISA/210 (second sheet) (July 1992)